




ARROW6.200.SP.W
FLR IV with Blinking LEDs
Category 6 Public Road - Max Speed 90km/h

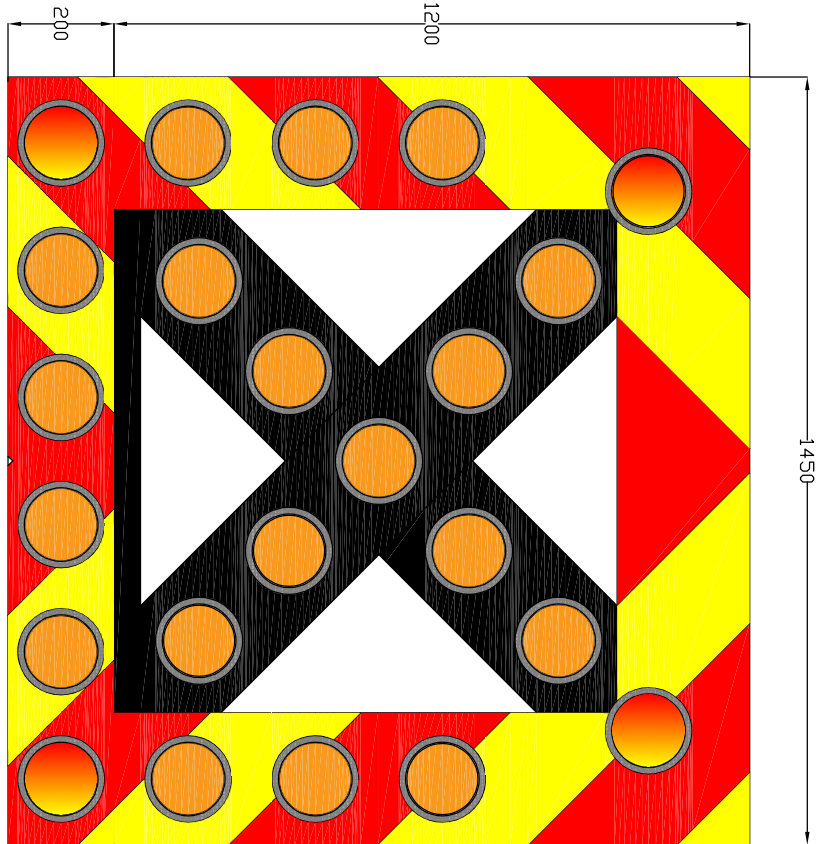


KG
80kg




200SL with 2x 60 Dominant® Primax® Led
 Shockproof Acrylic Glass DRT101
 EN12352 L8H - up to 35% dimmable at night
 Red and Amber coloured 2100 candela



200SL with 2x 60 Dominant® Primax® Led
 Shockproof Acrylic Glass DRT101
 EN12352 L8H - up to 35% dimmable at night
 Amber coloured 2100 candela



Retroreflecting foil with microprisms
 CE 89/106/EEG
 ETA 11/0521 11/0522 13/0303
 DIN 67520:2008 Class RA 3B
 Width 200mm

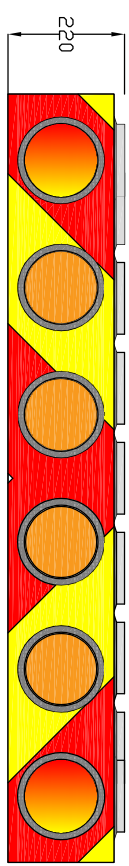

ALL DIMENSIONS IN MM



DATE	2021-01-07	TITLES	
DRAWN BY	RDE		
REVISION	00		
SIZE	A4	SIZE IMPR. IND.	
SCALE	1/1	A4 FLYER	
		ARROW6.200.SP.W	
		AGW 2021 FLR IV	