




LIGHTBAR SPECIFICATION SHEET

PART No: 17856

DESCRIPTION :

SOLEXMCCSPEAKER-C140948

Cable : Quick Disconnect with 22' Cable
 Mounting Kit : Metal Mounting kit LX Kit

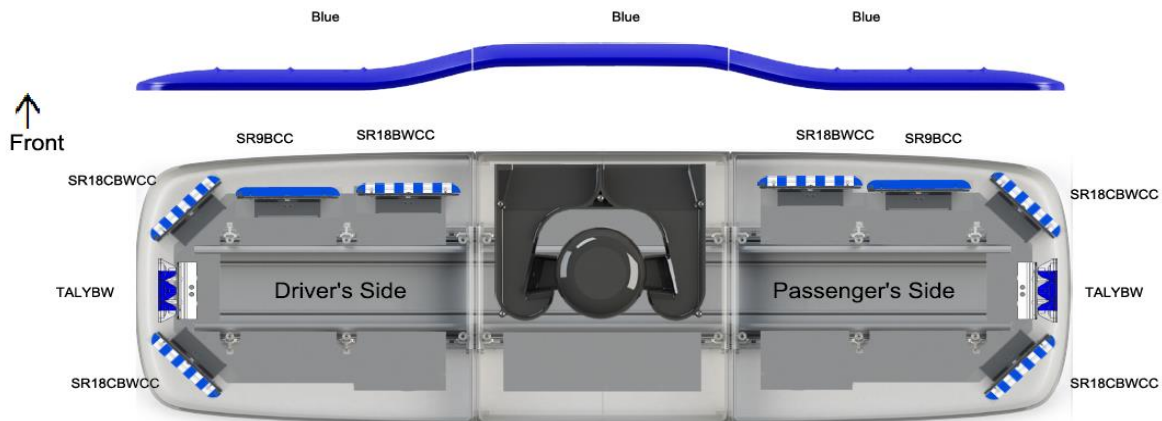

| Wire Color | Function | Notes |
|--------------------------|-----------------------------|-------|
| GRN/BLK | Level 1 (R65) | |
| WHT/BLK | SPEAKER + | |
| BLU/BLK | SPEAKER - | |
| GRN/WHT | SPEAKER + | |
| WHT | Arrowstick Flash | |
| BLU/WHT | Alley Light Flash | |
| BLK | Takedown Flash | |
| BLK/WHT | Alley Light Left | |
| RED | Arrowstick Left | |
| RED/WHT | Alley Light Right | |
| RED/BLK | Level 3 (Full Blue) | |
| ORG/BLK | Takedown Lights Steady Burn | |
| BLK/RED | SPEAKER - | |
| GRN | Cruise Lights | |
| ORG | Arrowstick Right | |
| BLU | Lightbar DIM | |
| RED 1,5mm ³ | Positive Lightbar | |
| RED 1,5mm ³ | Positive Lightbar | |
| RED 1,5mm ³ | Positive Lightbar | |
| BLACK 1,5mm ² | Ground | |
| BLACK 1,5mm ² | Ground | |
| BLACK 1,5mm ² | Ground | |
| BLACK 1,5mm ² | Ground | |

Notes:

- L1 = Level 1 (R65)
- L3 = Level 3 (Full blue cycle flash)
- L1 + L3 = Full Blue Cycle Flash + Front White Cycle Flash
- all functions are positive inputs
- Dim function dims the complete lightbar