




## PolyPM Relifted with DIN Control Unit

P0050F0021R

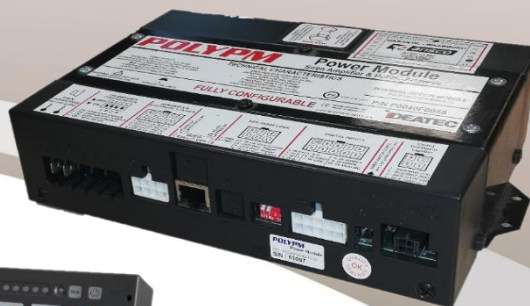

**POLYPM<sup>HD</sup>**

### Centralizing System

#### Key benefits

- > Easy installation
- > Equipped for controlling all electrical devices
- > Completely independent of existing electrical wiring

#### Features

- > Negative mass (housing)
- > 2 supply voltages possible
- > Automation and specific functions
- > Fully Programmable
- > 1 PolyPM Control Unit (icon/backlight)
- > 1 bus cable 2x RJ45 (4 meters long)
- > Error recognition by monitoring
  - Open load
  - About load
  - Short Circuit
- > Battery safe and protected
- > No additional relays or fuses required
- > Possibility to close doors
- > Compliance: E13\*10R03

#### Specifications

- > Operation Voltage: 12-24VDC
- > 10 static positive outputs (20A)
- > 2 static independent negative outputs (0.8A)
- > 8 negative outputs (arrowstick)
- > 2 positive and 2 negative inputs
- > 2 outputs for speakers (2x 100W/11.0Ω)(25 tones)
- > 1 input for horn
- > 1 USB input
- > Ambient temperature -25°C to +60°C
- > Power Module:
  - Weight 1070g
  - Dimensions 208 x 143 x 49 mm
- > DIN Control Unit
  - Weight 175g
  - Dimensions 187 x 58 x 33 mm (without foot)